



SCP Series

Slim Line LED Canopy Light

Descriptions

The SCP slim line LED canopy is ETL listed suitable for WET (IP65) locations. It's with low profile design, die cast aluminum housing and prismatic polycarbonate lens to be dustproof. It has 1/2" threaded conduit entrances on each side for easy installation and wiring.

It's an ideal lighting solution for Garages, Workshops, Utility Rooms, Storefronts, Sheds, Barns, Porches, Driveway canopy, Underpasses, Loading docks, Warehouses, Entryways, etc.



Specification Features

Construction

Rugged, die cast aluminum housing. Integrated housing with advanced thermal transmission. Polyester powder coating, gray finish, rust and corrosion proof.

Electrical

Integral UL Class II listed high performance LED driver. Universal input 120-277VAC, 50/60Hz, PF>0.9.

Optical

Prismatic Polycarbonate lens
High performance LM80 LEDs.
5000K CCT & CRI>70.standard.
Typically 120lm/w

Environmental

Operating Temperature 4°F to 122°F
(-20°C to 50°C)
50000 hours rated lifespan
ETL listed suitable for WET locations.

Installation/Mounting

Ceiling mount
Pendant with a 1/2" threaded conduit entry rod

Control

0-10V dimming

Warranty

5-year limited warranty

Ordering Information


Example : SCP40/H1/50K/G1

SCP	40	H1	50K	G1
Model	Waa	Voltage	CCT	Generation
SCP series LED Canopy Light	40 40W 70 70W	H1 120-277V H2 347V	30K 3000K 40K 4000K 50K 5000K	G1 G2 G3

Technical And Performance Data

Model	Watts W	5000K CCT	
		Lumens lm	Efficacy lm/w
SCP40	40	5100	120
SCP70	70	7500	110

Dimension

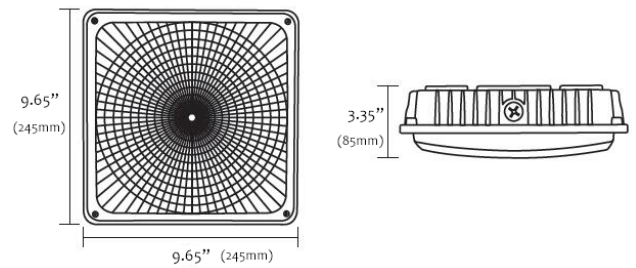

Accessories



Motion sensor



Emergency battery pack

Refer Pics

